




**SHOREY  
PRECAST  
CONCRETE  
PRODUCTS**

**TUNNEL TANKS  
10,000 - 25,000  
Gallons**

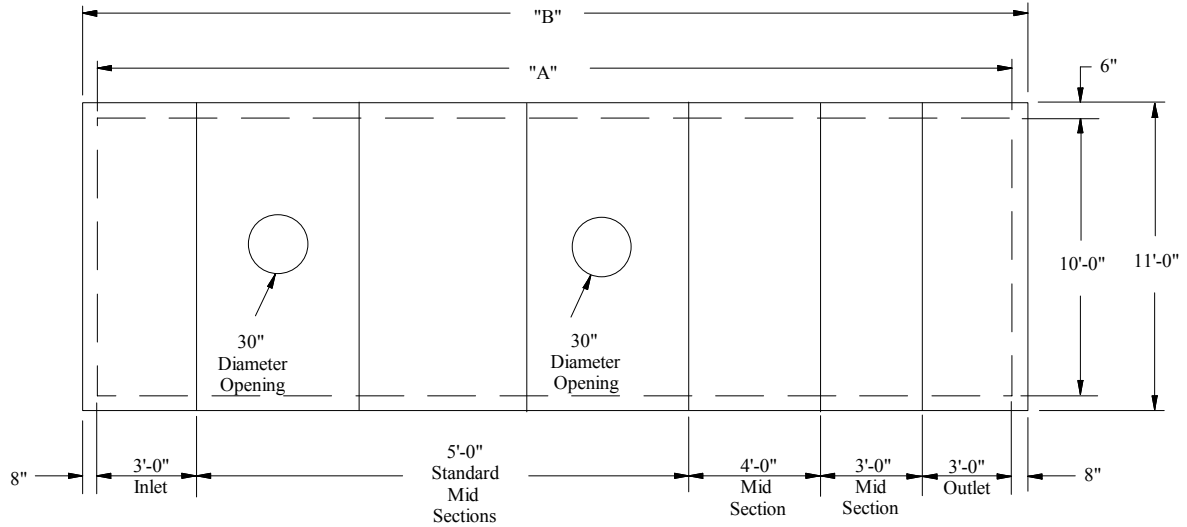

GALLONS	"A"	"B"	3'-0" Start/ Ends	3'-0" Mid Sections	4'-0" Mid Sections	5'-0" Mid Sections	Total Tank Weight
			20,715 lbs	9,710 lbs	12,945 lbs	16,180 lbs	
10,000	20'-0"	21'-4"	2	0	1	2	86,735 lbs
11,000	22'-0"	23'-4"	2	0	4	0	93,210 lbs
12,000	24'-0"	25'-4"	2	0	2	2	99,680 lbs
13,000	26'-0"	27'-4"	2	0	0	4	106,150 lbs
14,000	28'-0"	29'-4"	2	0	3	2	112,625 lbs
15,000	30'-0"	31'-4"	2	0	1	4	119,095 lbs
16,000	32'-0"	33'-4"	2	0	4	2	125,570 lbs
17,000	34'-0"	35'-4"	2	0	2	4	132,040 lbs
18,000	36'-0"	37'-4"	2	0	0	6	138,510 lbs
19,000	38'-0"	39'-4"	2	0	3	4	144,985 lbs
20,000	40'-0"	41'-4"	2	0	1	6	151,455 lbs
21,000	41'-0"	42'-4"	2	0	0	7	154,690 lbs
22,000	43'-0"	44'-4"	2	0	3	5	161,165 lbs
23,000	45'-0"	46'-4"	2	0	1	7	167,635 lbs
24,000	47'-0"	48'-4"	2	0	4	5	174,110 lbs
25,000	49'-0"	50'-4"	2	0	2	7	180,580 lbs

- Concrete Minimum Strength: 5,000 P.S.I @ 28 days
- Steel Reinforcement: AS-615-68, Grade 60
- Design Loading: AASHTO - H-20
- Meets ASTM Spec. C1227

**SHOREY PRECAST CONCRETE PRODUCTS**

351 Whites Path  
S. Yarmouth, MA 02664  
(800) 439-0965 • (508) 760-1070