


# 5,000 GAL (H-20) LOW PROFILE 4.5 FAST TANK INSIDE MOUNT

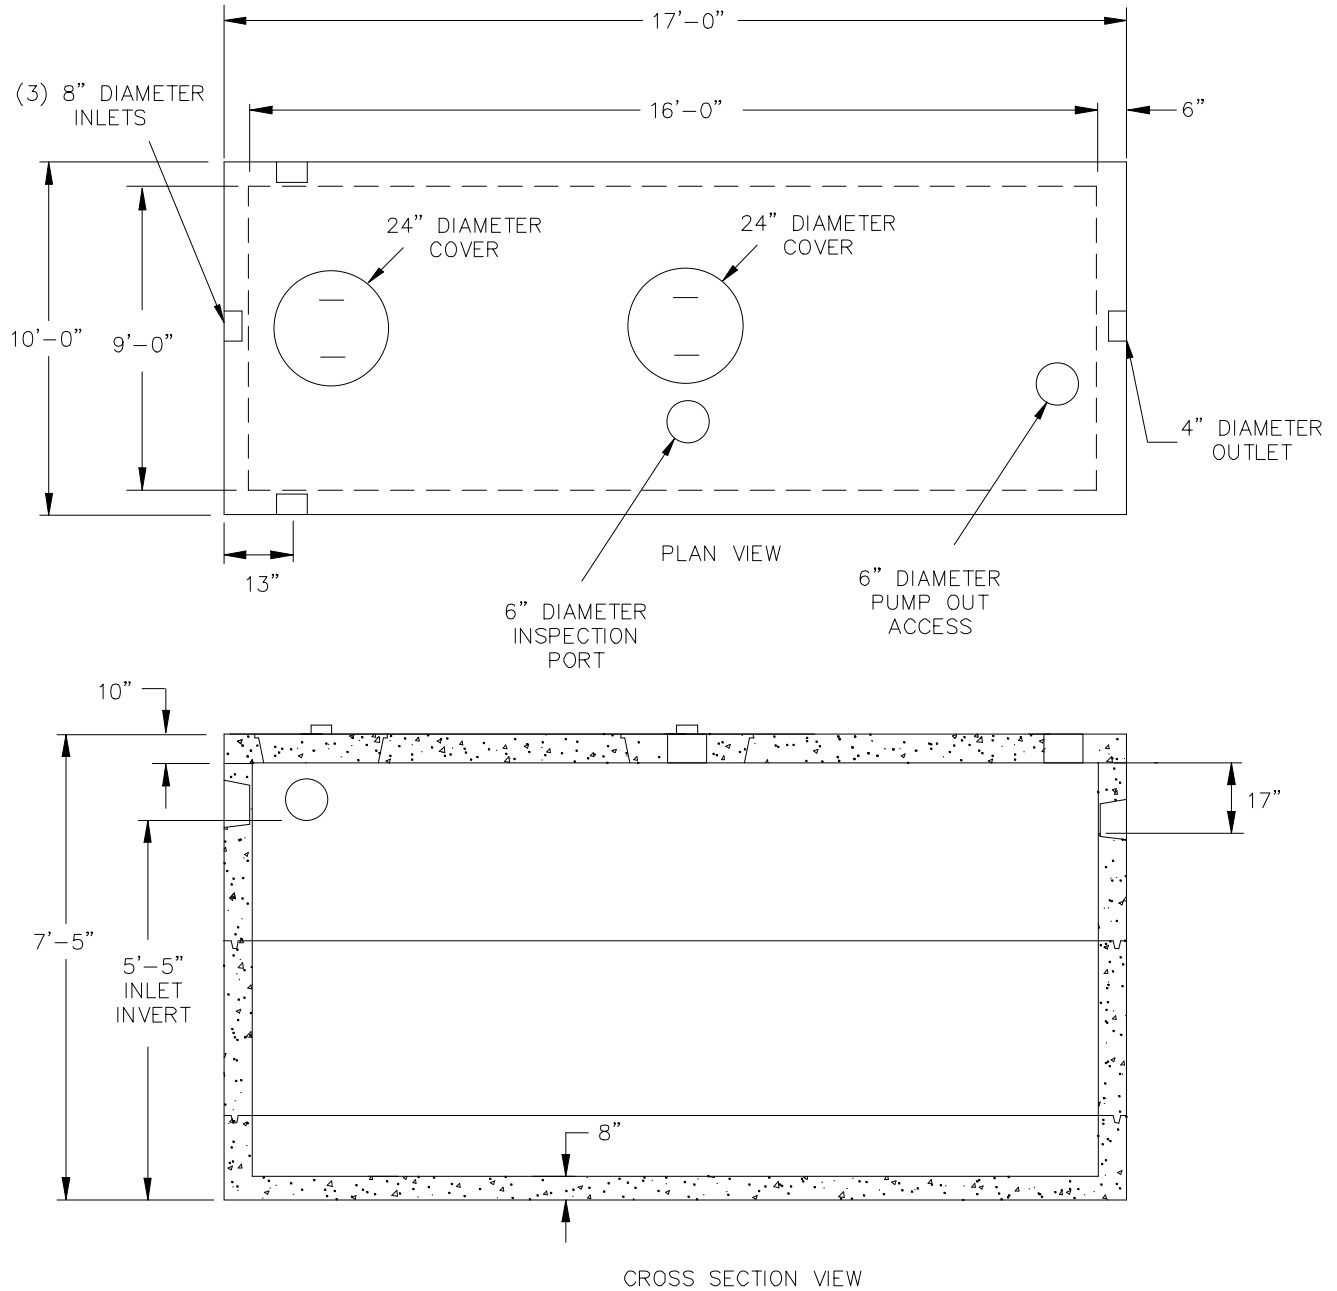

## SPECIFICATIONS

- Concrete Minimum Strength: 5,000 P.S.I @ 28 days
- Steel Reinforcement: AS-615-68, Grade 60
- Design Loading: AASHTO - H-20 Meets ASTM Spec. C1227
- Weight: 55,275 lbs.